

## AYC-F54

### Convertible 3x4 Backlit PIN Reader / Controller

**Part of the Convertible line of readers / controllers, this unit can be operated as an outdoor backlit keypad reader, which connects to any standard controller, or else it converts into a fully featured, 500-users stand-alone controller when connected to Rosslare's PS-x5 family of intelligent power supply/relay units. This unit provides a most effective solution for indoor and outdoor access systems where PIN credentials are required.**

### General Description

For a greater peace of mind, this sturdy access control unit provides a rugged keypad with advanced access control features, in an aesthetically-designed housing.

The AYC-F54 offers programmable PIN transmission formats, LED Control and tamper detection, providing extra security and flexibility.

Come rain or shine, this unit can handle the challenge, with its rugged ultraviolet-resistant housing and waterproof enclosure for maximum durability.

The backlit keypad is clearly visible day or night, making this unit ideal for residential and commercial applications.



### Main Features

- Supports 4 to 8-Digit PIN credentials.
- Smooth, attractive design, with all-weather indoor and outdoor operation.
- Large, high-visibility RED Backlit Keypad.
- 2 tri-colored LEDs and an integral sounder for programming and operation.
- User friendly menu, based on keypad, LED and sounder indicators.
- Back and Cover Optical tamper detection and output.
- Automatically recognizes Rosslare's PS-x5 intelligent power supply family converting it into a 500 users stand-alone controller with secure relays.

#### PROFESSIONAL GRADE FEATURES

- 8 Selectable PIN transmission modes including options for Key stream, Binary, Parity, and 3x4 Matrix.
- Comes with a mounting and drilling label, security screw, and tool set to prevent unauthorized opening.
- 60 cm (23.6 in.) shielded interface cable.




### Product Specifications

<b>ELECTRICAL CHARACTERISTICS</b>	
• Operating Voltage Range:	Reader mode: 5 to 16VDC from a standard controller Controller mode: PS-X5T series intelligent power supplies
• Input Current:	Standby: 75mA at 12VDC Maximum: 110mA at 16VDC
• Tamper:	Optical back tamper sensor, O.C. active low, 32mA max. sink current
<b>OPERATIONAL CHARACTERISTICS</b>	
• Keypad:	3x4 Keys for local programming and 4 to 8 digit PIN codes entry
• Design:	Epoxy potted, fully sealed in a rugged polycarbonate enclosure. Red illuminated rubber keys. Suitable for harsh environments.
• Audio/Visual:	Two tri-color LED indicators, Built-in buzzer
<b>READER MODE</b>	
• LED Control:	Dry contact, N.O.
• Facility Code:	Programmable
• PIN Code Formats:	8 selectable formats, from single to 8 digit PIN Codes, including: - 6 or 8 Bits Wiegand, Nibble/Parity options, optional Rosslare Format - 1-5 keys, fixed 4 keys, 6 keys BCD w/ facility code, Wiegand 26 bits - 3x4 Matrix single key - 1 to 8 keys BCD, Clock & Data
<b>CONTROLLER MODE</b>	
	(available with PS-15T/PS-25T series intelligent power supplies only)
• Capacity:	500 Users, single/dual PIN code each
• User Levels:	Normal, Secure and Master
• Security Modes:	Normal, Bypass and Secure
• Outputs:	Lock Strike output Auxiliary output (PS-25T series)
• Inputs:	REX (Request to Exit) Auxiliary/Door Monitor with 10 programmable modes
<b>ENVIRONMENTAL CHARACTERISTICS</b>	
• Operating Environment:	All weather, indoor and outdoor use, meets IP65
• Operating Temperature:	-30°C to 65°C (-22°F to 150°F)
• Operating Humidity:	0 to 95%
<b>PHYSICAL CHARACTERISTICS</b>	
• Dimensions:	120mm x 76mm x 21mm (4.72" x 2.99" x 0.83")
• Weight:	215g (0.47 lbs)

### Dual Application Product

AYC-F54 is compatible with standard access controllers in Reader mode. With Rosslare's PS-x15 or PS-x25 intelligent power supply series it automatically converts into a 500-user secure controller.

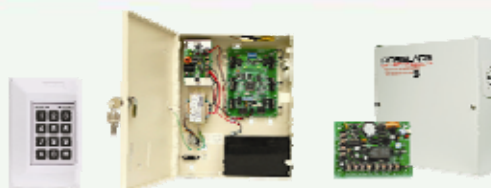

### Additional Information

The AYC-F54 is covered by Rosslare's 5-year Limited Product Warranty.

For sales information or product documentation, please visit our website:  
<http://www.rosslaresecurity.com>.



CFR47 Part 15b Certified



UL-294 Listed for Access Control System Units

